

4K
ULTRA HD
4K UHD
Zero
Bonding



Data Sheet


Display Size(inch's)

65

75

86

98



Ai Inbuild



Google Assistance



64 Point Touch



8 GB RAM



Palm & Elbow Rejection



Latest Andriod



Front Type USB Port



MDM



128+512 GB Storage



4k Ultra High Defination



48MP Camera



Wireless Screen Sharing upto 9 Devices



USB 3.0x 3 ports In Front



IFP Stand



AI-Powered LMS



OPS




DMS Software



White board Software



Offline Quiz bank



ChatGpt




Artificial Intelligence Enable Software

All images in the brochure are for pictorial reference only. Actual products and specifications may vary due to iterative technology.

4K
ULTRA HD

4K UHD
Zero
Bonding

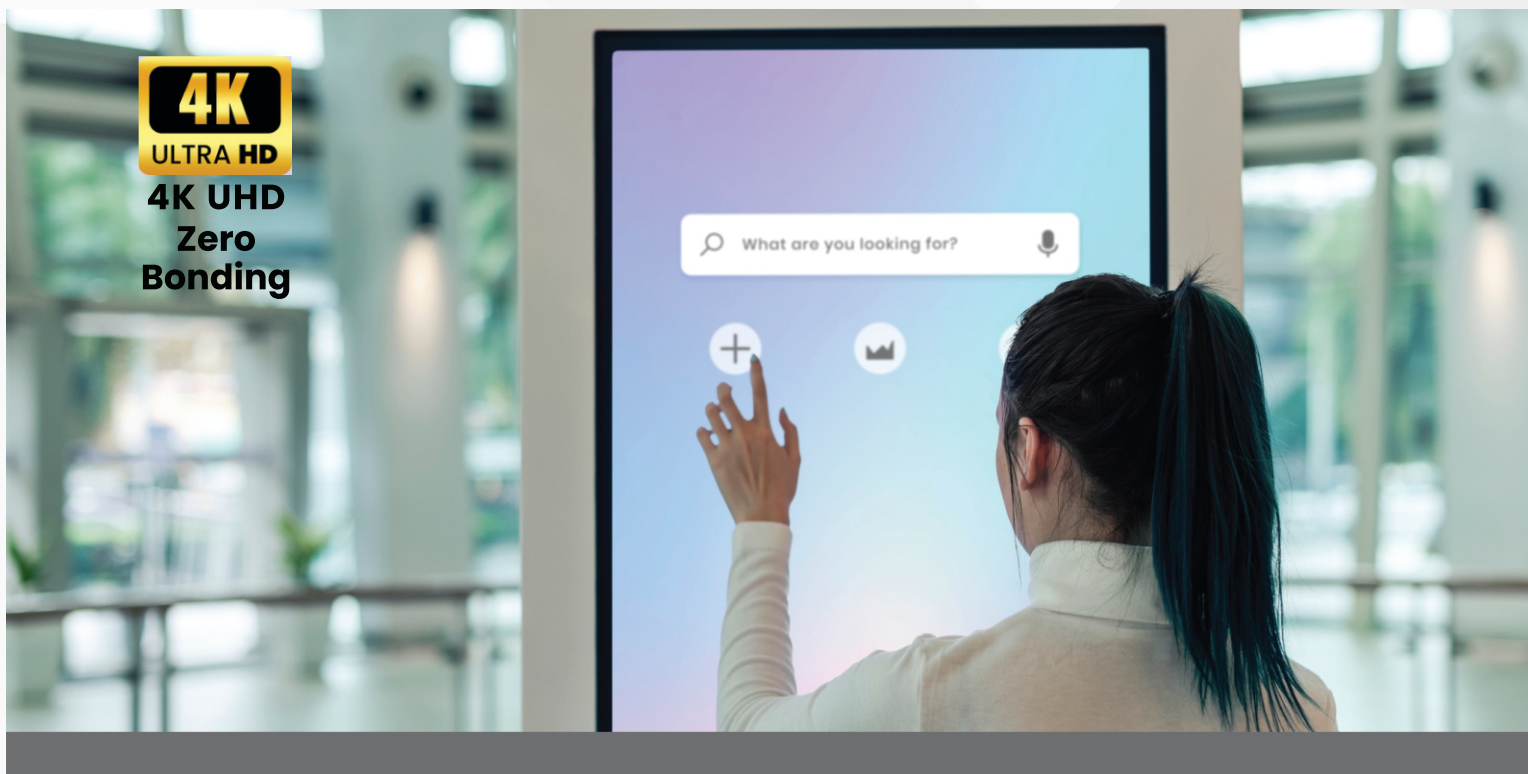

**Digital
Podium**



**I-Frame
Standee**



**A-Digital
Standee**



**Wall Mount
Digital Signage**



**Digital Kiosk
Machine**

White Feather Innovations Pvt Ltd
Office: New Delhi | Kolkata | Raipur

📍 303, Best Arcade Building,
Sector-12, Dwarka,
New Delhi-110075

☎ +91 98919 36841

✉ accounts@pixmainnovations.com

📍 Office No. 17, 18th Floor, Infinity
Benchmark
Kolkata- 700106

☎ +91 98746 66777

✉ east.sales@pixmainnovations.com

📍 A-140, A-1, Sector-7B, kamal Vihar,
Raipur-492004 (C.G.)

☎ +91 62915 09470

✉ md@pixmainnovations.com

White Feather Innovations P Ltd
WhatsApp Business account



Scan this code to start a WhatsApp chat
with White Feather innovations P Ltd

@WHITEFEATHERINNOVATIONS
Instagram account




Scan this code to explore and follow White
Feather innovations P Ltd on Instagram

☎ +91 62915 09470

🌐 <http://pixainnovations.com>

✉ innovationswhitefeather@gmail.com

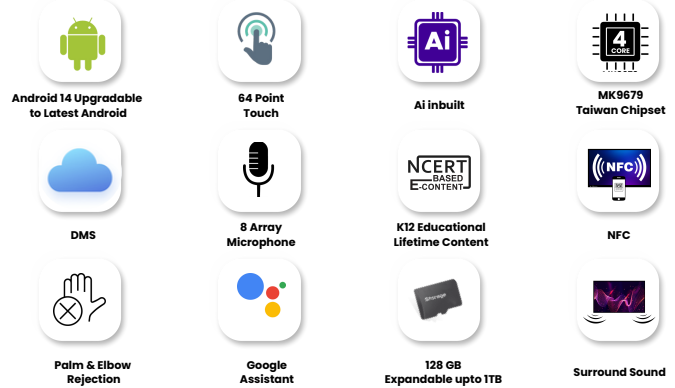

5 Years Warranty *

PANEL	SIZE	RESPOND TIME	VISUAL RATIO	PANEL TYPE	DISPLAY COLOURS
	65"	<2.0ms	16:09	LCD/LED	1.07G(8BITS+FRC)
	FREQUENCY	MAX VISUAL AREA	RESOLUTION	PIXEL PITCH	COLOUR SATURABILITY
	60 Hz	1432(H)x807(V)mm	3840x2160		70% NTSC
	BRIGHTNESS	LIFE SPAN	CONTRAST RATIO	LIGHT SOURCE	VIEW ANGLE
	350cd/m2(±10%)	≥50,000 Hr.	1200:01:00	DLED	LCD/LED

MICROPHONE & NFC CAMERA (OPTIONAL)	FRONT BUILD IN	CAMERA (OPTIONAL)	NFC
	8 ARRAY MICROPHONE AND 10mtr PICKUP DISTANCE	48MP	SCREEN SHARING AND DATA TRANSFER

AUDIO/VIDEO PARAMETERS	SPEAKERS	SOUND TRACK	POWER	SUBWOOFER
		2.1 CHANNEL	15 X 2 WATT	20 WATT

TOUCH PARAMETERS	TOUCH SPECIFICATIONS	SUPPORT SYSTEM		OUTPUT CO-ORDINATES	
	NON-CONTACT INFRARED SENSING TECHNOLOGY	WINDOWS 10/WINDOWS 8/WINDOWS 11 /ANDROID/LINUX/MAC OS X/CHROME		32767(W) x 32767(D)	
	TOUCH POINTS	Min. IDENTIFIER	WRITING DISPLAY		WRITING HEIGHT
	64	2mm	SINGLE STYLUS PEN 2 COLOR		MAX 400W
	RESPOND TIME	TOUCH DEPTH	INPUT MODE		
	<2.0ms	±1mm(OVER 90% AREA)	OPAQUE OBJECT(FINGURE,PEN etc)		

SYSTEM	VERSION	CPU	GPU	RAM	ROM
	ANDROID 14.0	Quad Core 1.5GHZ	G52 - MCI	8GB	128GB

WIRELESS	BLUETOOTH	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		5	2.4/5Ghz	10mtr	
	WIFI	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		6	2.4/5Ghz	10mtr	


REAR I/O INTERFACE	HDMI IN	USB2.0	USB 3.0	HDMI OUT	USB TOUCH PORT
	2	1	1	1	1
	LINE OUT	OPTICAL OUT	LAN RJ 45 IN	TF CARD	RS232
	1	1	1	1	1
	-	-	-	-	MIC IN
	-	-	-	-	1

FRONT INTERFACE	USB 3.0	TOUCH USB	HDMI IN	TYPE C
	2	1	1	1

POWER	VOLTAGE	MAX. POWER CONSUMPTION	STAND BY POWER CONSUMPTION
	100-240 AC 50/60Hz 4A	280W	≤0.5W

STRUCTURE	BARE DIMENSION	PACKING DIMENSION	MACHINE + WALL MOUNT THICKNESS	VESA HOLE SITE
	1485 × 91.6 × 897.5mm	1653 × 253 × 1037mm	116.5mm (WIB9060G)	600 × 400mm
	NET WEIGHT	GROSS WEIGHT	WALL MOUNTING SCREW SPECIFICATION	
	47.8KG	61.8 KG	M8 × 25mm	

ENVIRONMENT	WORKING TEMPERATURE	WORKING HUMIDITY	STORAGE TEMPERATURE	STORAGE HUMIDITY	WORKING ELEVATION
	0°C~40°C	10%-90%RH	-20°C~60°C	10%-90%RH	<5000m

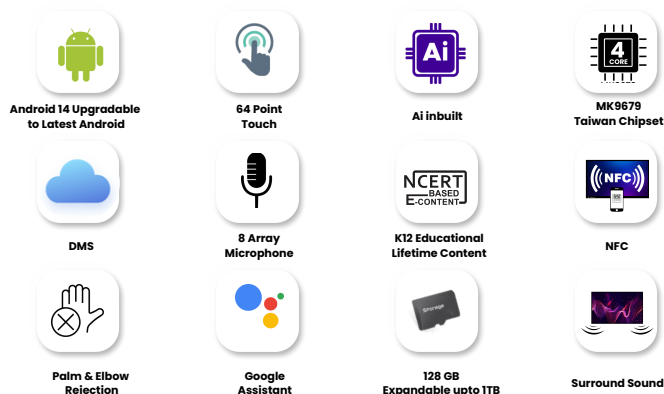

Specifications

5 Years Warranty *

PANEL	SIZE	RESPOND TIME	VISUAL RATIO	PANEL TYPE	DISPLAY COLOURS
	75"	<2.0ms	16:09	LCD/LED	1.07G(8BITS+FRC)
	FREQUENCY	MAX VISUAL AREA	RESOLUTION	PIXEL PITCH	COLOUR SATURABILITY
	60 Hz	1649.66(H)x927.93(V)mm	3840x2160		70% NTSC
	BRIGHTNESS	LIFE SPAN	CONTRAST RATIO	LIGHT SOURCE	VIEW ANGLE
	400cd/m2(±10%)	≥50,000 Hr.	1200:01:00	DLED	LCD/LED

MICROPHONE & NFC CAMERA (OPTIONAL)	FRONT BUILD IN	CAMERA (OPTIONAL)	NFC
	8 ARRAY MICROPHONE AND 10mtr PICKUP DISTANCE	48MP	SCREEN SHARING AND DATA TRANSFER

AUDIO/VIDEO PARAMETERS	SPEAKERS	SOUND TRACK	POWER	SUBWOOFER
		2.1 CHANNEL	15 X 2 WATT	20 WATT

TOUCH PARAMETERS	TOUCH SPECIFICATIONS	SUPPORT SYSTEM		OUTPUT CO-ORDINATES	
	NON-CONTACT INFRARED SENSING TECHNOLOGY	WINDOWS 10/WINDOWS 8/WINDOWS 11 /ANDROID/LINUX/MAC OS X/CHROME		32767(W) x 32767(D)	
	TOUCH POINTS	Min. IDENTIFIER	WRITING DISPLAY		WRITING HEIGHT
	64	2mm	SINGLE STYLUS PEN 2 COLOR		MAX 400W
	RESPOND TIME	TOUCH DEPTH	INPUT MODE		
	<2.0ms	±1mm(OVER 90% AREA)	OPAQUE OBJECT(FINGURE,PEN etc)		

SYSTEM	VERSION	CPU	GPU	RAM	ROM
	ANDROID 14.0	Quad Core 1.5GHZ	G52 - MCI	8GB	128GB

WIRELESS	BLUETOOTH	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		5	2.4/5Ghz	10mtr	
	WIFI	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		6	2.4/5Ghz	10mtr	


REAR I/O INTERFACE	HDMI IN	USB2.0	USB 3.0	HDMI OUT	USB TOUCH PORT
	2	1	1	1	1
	LINE OUT	OPTICAL OUT	LAN RJ 45 IN	TF CARD	RS232
	1	1	1	1	1
	-	-	-	-	MIC IN
	-	-	-	-	1

FRONT INTERFACE	USB 3.0	TOUCH USB	HDMI IN	TYPE C
	2	1	1	1

POWER	VOLTAGE	MAX. POWER CONSUMPTION	STAND BY POWER CONSUMPTION
	100-240 AC 50/60Hz 4A	280W	≤0.5W

STRUCTURE	BARE DIMENSION	PACKING DIMENSION	MACHINE + WALL MOUNT THICKNESS	VESA HOLE SITE
	1707 × 91.8 × 1022.7mm	1873 × 270 × 1197mm	118mm (WIB9060G)	800 × 400mm
	NET WEIGHT	GROSS WEIGHT	WALL MOUNTING SCREW SPECIFICATION	
	61.8KG	81.3 KG	M8 × 25mm	

ENVIRONMENT	WORKING TEMPERATURE	WORKING HUMIDITY	STORAGE TEMPERATURE	STORAGE HUMIDITY	WORKING ELEVATION
	0°C~40°C	10%-90%RH	-20°C~60°C	10%-90%RH	<5000m

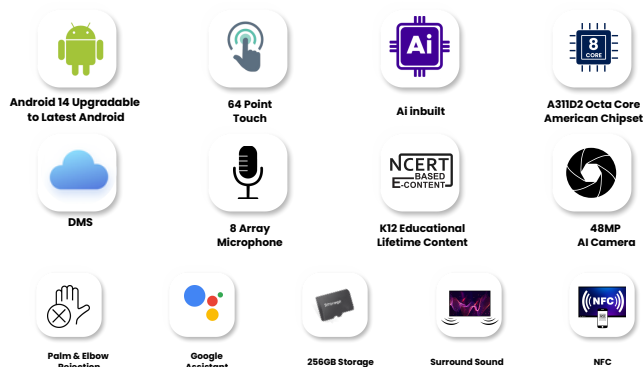

5 Years Warranty *

PANEL	SIZE	RESPOND TIME	VISUAL RATIO	PANEL TYPE	DISPLAY COLOURS
	75"	<2.0ms	16:09	LCD/LED	1.07G(8BITS+FRC)
	FREQUENCY	MAX VISUAL AREA	RESOLUTION	PIXEL PITCH	COLOUR SATURABILITY
	60 Hz	1649.66(H)x927.93(V)mm	3840x2160		70% NTSC
	BRIGHTNESS	LIFE SPAN	CONTRAST RATIO	LIGHT SOURCE	VIEW ANGLE
	400cd/m2(±10%)	≥50,000 Hr.	1200:01:00	DLED	LCD/LED

CAMERA+ MICROPHONE & NFC	FRONT BUILD IN	Camera	NFC
	8 ARRAY MICROPHONE AND 10mtr PICKUP DISTANCE	48MP Ai Camera	SCREEN SHARING AND DATA TRANSFER

AUDIO/VIDEO PARAMETERS	SPEAKERS	SOUND TRACK	POWER	SUBWOOFER
		2.1 CHANNEL	15 X 2 WATT	20 WATT

TOUCH PARAMETERS	TOUCH SPECIFICATIONS	SUPPORT SYSTEM		OUTPUT CO-ORDINATES	
	NON-CONTACT INFRARED SENSING TECHNOLOGY	WINDOWS 10/WINDOWS 8/WINDOWS 11 /ANDROID/LINUX/MAC OS X/CHROME		32767(W) x 32767(D)	
	TOUCH POINTS	Min. IDENTIFIER	WRITING DISPLAY		WRITING HEIGHT
	64	2mm	SINGLE STYLUS PEN 2 COLOR		MAX 400W
	RESPOND TIME	TOUCH DEPTH	INPUT MODE		
	<2.0ms	±1mm(OVER 90% AREA)	OPAQUE OBJECT(FINGURE,PEN etc)		

SYSTEM	VERSION	CPU	GPU	RAM	ROM
	ANDROID 14.0	A73*4+A53*4	Mali-G52MP8 (8EE)	16GB	256GB

WIRELESS	BLUETOOTH	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		5	2.4/5Ghz	10mtr	
	WIFI	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		6	2.4/5Ghz	10mtr	


REAR I/O INTERFACE	MIC IN	USB2.0	USB 3.0	HDMI IN	USB TOUCH OUT
	1	1	1	2	1
	HDMI OUT	OPTICAL OUT	LAN RJ 45 IN	LINE OUT	RS232
	1	1	1	1	1
	TF CARD				
	1				

FRONT INTERFACE	USB 3.0	TOUCH USB	HDMI IN	TYPE C
	2	1	1	1

POWER	VOLTAGE	MAX. POWER CONSUMPTION	STAND BY POWER CONSUMPTION
	100~240 AC 50/60Hz 4A	280W	≤0.5W

STRUCTURE	BARE DIMENSION	PACKING DIMENSION	MACHINE + WALL MOUNT THICKNESS	VESA HOLE SITE
	1707 × 91.8 × 1022.7mm	1873 × 270 × 1197mm	118mm (WIB9060G)	800 × 400mm
	NET WEIGHT	GROSS WEIGHT	WALL MOUNTING SCREW SPECIFICATION	
	61.8KG	81.3 KG	M8 × 25mm	

ENVIRONMENT	WORKING TEMPERATURE	WORKING HUMIDITY	STORAGE TEMPERATURE	STORAGE HUMIDITY	WORKING ELEVATION
	0°C~40°C	10%-90%RH	-20°C~60°C	10%-90%RH	<5000m

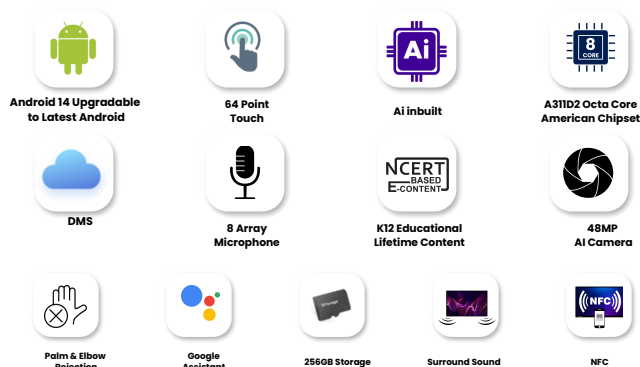

5 Years Warranty *

PANEL	SIZE	RESPOND TIME	VISUAL RATIO	PANEL TYPE	DISPLAY COLOURS
	86"	<2.0ms	16:09	LCD/LED	1.07G(8BITS+FRC)
	FREQUENCY	MAX VISUAL AREA	RESOLUTION	PIXEL PITCH	COLOUR SATURABILITY
	60 Hz	1895.04(H)x1065.96(V)mm	3840x2160		70% NTSC
	BRIGHTNESS	LIFE SPAN	CONTRAST RATIO	LIGHT SOURCE	VIEW ANGLE
	400cd/m2(±10%)	≥50,000 Hr.	1200:01:00	DLED	LCD/LED

CAMERA+ MICROPHONE & NFC	FRONT BUILD IN	Camera	NFC
	8 ARRAY MICROPHONE AND 10mtr PICKUP DISTANCE	48MP Ai Camera	SCREEN SHARING AND DATA TRANSFER

AUDIO/VIDEO PARAMETERS	SPEAKERS	SOUND TRACK	POWER	SUBWOOFER
		2.1 CHANNEL	15 X 2 WATT	20 WATT

TOUCH PARAMETERS	TOUCH SPECIFICATIONS	SUPPORT SYSTEM		OUTPUT CO-ORDINATES	
	NON-CONTACT INFRARED SENSING TECHNOLOGY	WINDOWS 10/WINDOWS 8/WINDOWS 11 /ANDROID/LINUX/MAC OS X/CHROME		32767(W) x 32767(D)	
	TOUCH POINTS	Min. IDENTIFIER	WRITING DISPLAY		WRITING HEIGHT
	64	2mm	SINGLE STYLUS PEN 2 COLOR		MAX 400W
	RESPOND TIME	TOUCH DEPTH	INPUT MODE		
	<2.0ms	±1mm(OVER 90% AREA)	OPAQUE OBJECT(FINGURE,PEN etc)		

SYSTEM	VERSION	CPU	GPU	RAM	ROM
	ANDROID 14.0	A73*4+A53*4	Mali-G52MP8 (8EE)	16GB	256GB

WIRELESS	BLUETOOTH	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		5	2.4/5Ghz	10mtr	
	WIFI	VERSION	WORKING FREQUENCY	WORKING DISTANCE	REMARK VIA
		6	2.4/5Ghz	10mtr	

REAR I/O INTERFACE	MIC IN	USB2.0	USB 3.0	HDMI IN	USB TOUCH OUT
	1	1	1	2	1
	HDMI OUT	OPTICAL OUT	LAN RJ 45 IN	LINE OUT	RS232
	1	1	1	1	1
	TF CARD				
	1				

FRONT INTERFACE	USB 3.0	TOUCH USB	HDMI IN	TYPE C
	2	1	1	1

POWER	VOLTAGE	MAX. POWER CONSUMPTION	STAND BY POWER CONSUMPTION
	100~240 AC 50/60Hz 4A	280W	≤0.5W

STRUCTURE	BARE DIMENSION	PACKING DIMENSION	MACHINE + WALL MOUNT THICKNESS	VESA HOLE SITE
	1953.4 × 92 ×1161.4mm	2135 × 270 × 1332mm	130mm (WIB9060G)	800 × 600mm
	NET WEIGHT	GROSS WEIGHT	WALL MOUNTING SCREW SPECIFICATION	
	74.4 KG	95.3 KG	M8 × 25mm	

ENVIRONMENT	WORKING TEMPERATURE	WORKING HUMIDITY	STORAGE TEMPERATURE	STORAGE HUMIDITY	WORKING ELEVATION
	0°C~40°C	10%-90%RH	-20°C~60°C	10%-90%RH	<5000m



Particular	Technical Specification (43")	Technical Specification (32")
LCD Size	43"	32"
Type of Panel	IPS	IPS
Resolution	Full HD / 1920 x 1080 Pixels	HD / 1280 x 720 Pixels
Viewing Angle	178° (H/V)	178° (H/V)
Light Source	DLED	DLED
Brightness	350cd/m ²	350cd/m ²
System Version	Android-10 with 2/16GB	Android-10 with 2/16GB
RAM/ROM	2GB / 16GB	2GB / 16GB
Life Span	>= 40000 HRS	>= 40000 HRS
Speaker	2*10 W	2*10 W
Bluetooth/WIFI	INBUILT	INBUILT
Voltage	100-240V 50/60Hz	100-240V 50/60Hz
USB 2.0	1	1
Rj45	1	1
Aspect Ratio	16/9	16/9
Product Dimension	W-523MM x H-1612.5MM x D-80MM	W-486MM x H-1412MM x D-80MM
Product Weight	22.5 KG	24 KG

📍 303, Best Arcade Building,
Sector-12, Dwarka,
New Delhi-110075

☎ +91 98919 36841

✉ accounts@pixmainnovations.com

📍 Office No. 17, 18th Floor, Infinity
Benchmark
Kolkata- 700106

☎ +91 98746 66777

✉ east.sales@pixmainnovations.com

📍 A-140, A-1, Sector-7B, kamal Vihar,
Raipur-492004 (C.G.)

☎ +91 62915 09470

✉ md@pixmainnovations.com



Particular	Technical Specification (43")	Technical Specification (32")
LCD Size	43"	32"
Type of Panel	IPS	IPS
Resolution	Full HD	Full HD
Frequency	60 Hz	60 Hz
Viewing Angle	178° (H/V)	178° (H/V)
Light Source	DLED	DLED
Brightness	350cd/m ²	350cd/m ²
System Version	Android-10	Android-10
RAM	2GB	2GB
ROM	16GB	16GB
Product Dimension	W-630MM x H-1650MM x D-80MM	W-510MM x H-1650MM x D-80MM
Bluetooth/WIFI	INBUILT	INBUILT
Voltage	100-240V 50/60Hz	100-240V 50/60Hz
USB 2.0	1	1
RJ45	1	1

📍 303, Best Arcade Building,
Sector-12, Dwarka,
New Delhi-110075

☎ +91 98919 36841

✉ accounts@pixmainnovations.com

📍 Office No. 17, 18th Floor, Infinity
Benchmark
Kolkata- 700106

☎ +91 98746 66777

✉ east.sales@pixmainnovations.com

📍 A-140, A-1, Sector-7B, kamal Vihar,
Raipur-492004 (C.G.)

☎ +91 62915 09470

✉ md@pixmainnovations.com